

Fire Rated Steel Roller Shutter

CSS-Flame240

Usage: Any type of application requiring 30 minute - 4 hour fire protection


Specification;

Electric Only

Galvanised steel roller shutter, 75mm solid 20g profiled lath, 'T' bottom rail, 64mm 'U' channels, Heavy gauge tubular barrel assembly, 24v tubular fire motor, battery back-up, fire interface panel, keyswitch operation, galvanised steel pressed canopy, Hammerite grey powder coat to steelwork frame only (full powder coating available on request at additional cost)

Optional Extras;

Fail safe auto close feature, smoke or heat detection, audio/visual alarm

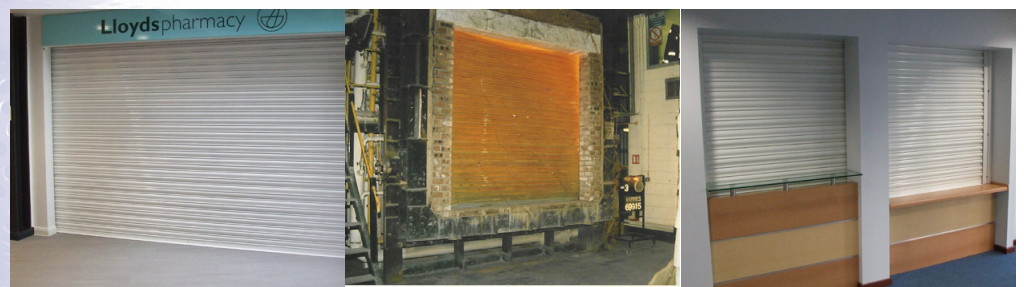

DESIGN

MANUFACTURE

INSTALLATION